



The electropumps 4SDP 1,2,3,6 series comply with the European Regulation no. 547/2012.

### Materials

Pump	4SDP	6SD, 6SDN
Components		
External jacket	Cr-Ni steel AISI 304	Cr-Ni steel AISI 304
Stage casing	Cr-Ni steel AISI 304	Cr-Ni steel AISI 304
Diffuser	Polycarbonate	GFN2V* (NORYL®)*
Impeller	GFN2V* (NORYL®)*	GFN2V* (NORYL®)*
Wear ring	-	Cr-Ni steel AISI 304
Shaft	Cr-Ni steel AISI 304	Cr steel AISI 430 F
Delivery casing	Cr-Ni steel	Bronze
Suction lantern	AISI 304	G-Cu Sn 10 EN 1982
Bearing bush	POM - POLYACETAL	Rubber
Strainer	Cr-Ni steel AISI 304	Cr-Ni steel AISI 430
Screws	Cr-Ni steel AISI 304	Cr-Ni steel AISI 304

\* Trademark of General Electric

### Motor

Components	4CS-R	6CS-R
External frame	Cr-Ni steel AISI 304L	Cr-Ni steel AISI 304 (Steel AISI 316 for 6")
Motor flange	Cast iron with cathoporesis treatment and protected with a Cr-Ni steel AISI 304 cover	Cast iron GJL 200 EN 1561
Shaft end	Cr-Ni steel AISI 304	Cr steel AISI 431
Thrust bearing	Oil wetted	Brass pads

### Construction

Submersible borehole pumps for 4" wells (DN 100 mm), and 6" (DN 150 mm), with external jacket in stainless steel AISI 304 and impellers in Noryl.

#### Impellers

radial floating impellers	4SDP
radial impellers	6SDN 12, 16, 21
mixed flow impellers	6SD 18, 19, 20

**Connection:** screwed connection ISO 228.  
Delivery casing with built-in non-return valve.

### Applications

For water supply.  
For civil and industrial applications.  
For fire fighting applications.  
For irrigation.

### Operating conditions

Liquid temperature: - up to a 35 °C for 4" motors  
- up to a 25 °C for 6" motors.  
Max. sand quantity into the water: 150 g/m<sup>3</sup> (300 g/m<sup>3</sup> high percentage of solids and sand).  
Continuous duty.

### Rewindable motor CS-R series

2-pole induction motor, 50 Hz (n ≈ 2900 rpm).  
Sized for connection to the pumps according to NEMA Standards.  
Standard voltages:

- single-phase 230 V up to 2,2 kW for 4" motors.
- three-phase 230 V; 400 V, for 4" motors.
- three-phase 400 V; 400/690 V, for 6" motors.

Voltage tolerance : +6% / -10%.

In order to limit both current and torque at each starting, for rated motor powers equal to or higher than 7.5 kW, one of the following types of starting is necessary: star/delta, soft starter, stator impedance or autotransformer.

Insulation class F for 4" motors, class E for 6" motors.

Protection IP 68.

Continuous duty.

Motor suitable operation with frequency converter (with suitable filter dv/dt).

### Operating conditions motor

Motor	Max. Liquid temperature	Cooling: minimum flow velocity	Max. starts per hour	Motor P2
4CS-R	35 °C	0,08 m/s	20	all types
6CS-R	30 °C	0,1 m/s	15	4÷11 kW
		0,2 m/s	15	13÷15 kW
	25 °C	0,2 m/s	15	18,5 kW
		0,2 m/s	13	22÷30 kW

### Special features on request

- Other voltages.
- 60 Hz frequency.
- Other temperatures.
- Encapsulated motor FK series.

### Designation

4 SDP M 6 / 14

Ø of the well in inches \_\_\_\_\_


Series \_\_\_\_\_

Single-phase motor (up to max. 2,2 kW) \_\_\_\_\_

Stage identification \_\_\_\_\_

Number of stages \_\_\_\_\_

### Coverage chart $n \approx 2900$ rpm

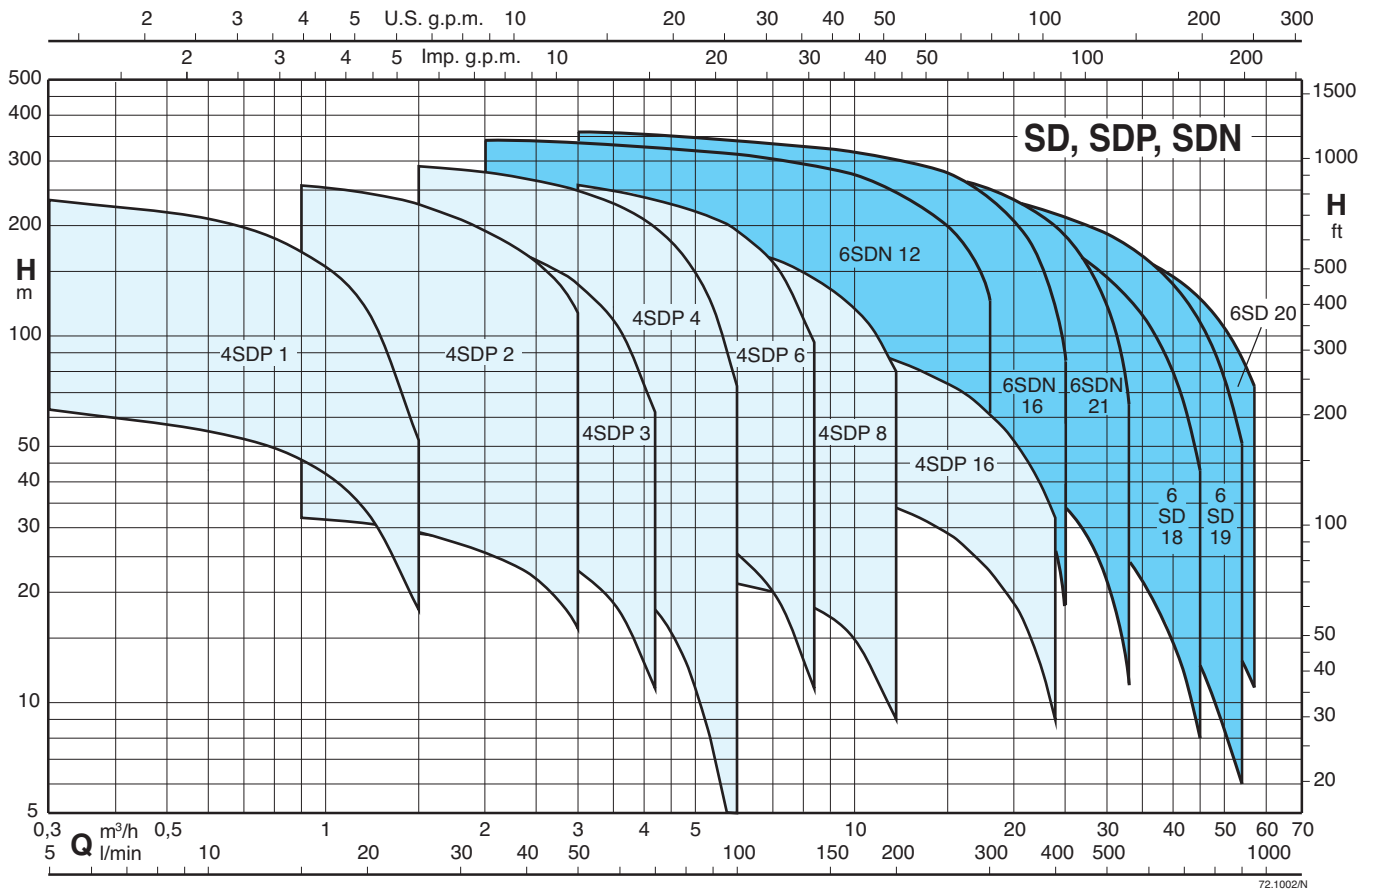

72.1002N





# 4SDP 1

Submersible borehole pumps for 4" wells



## Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

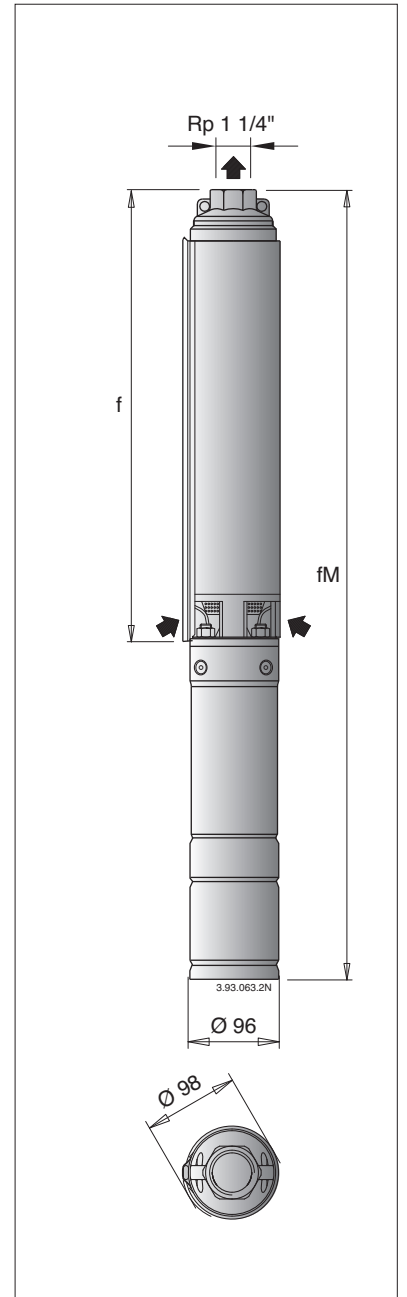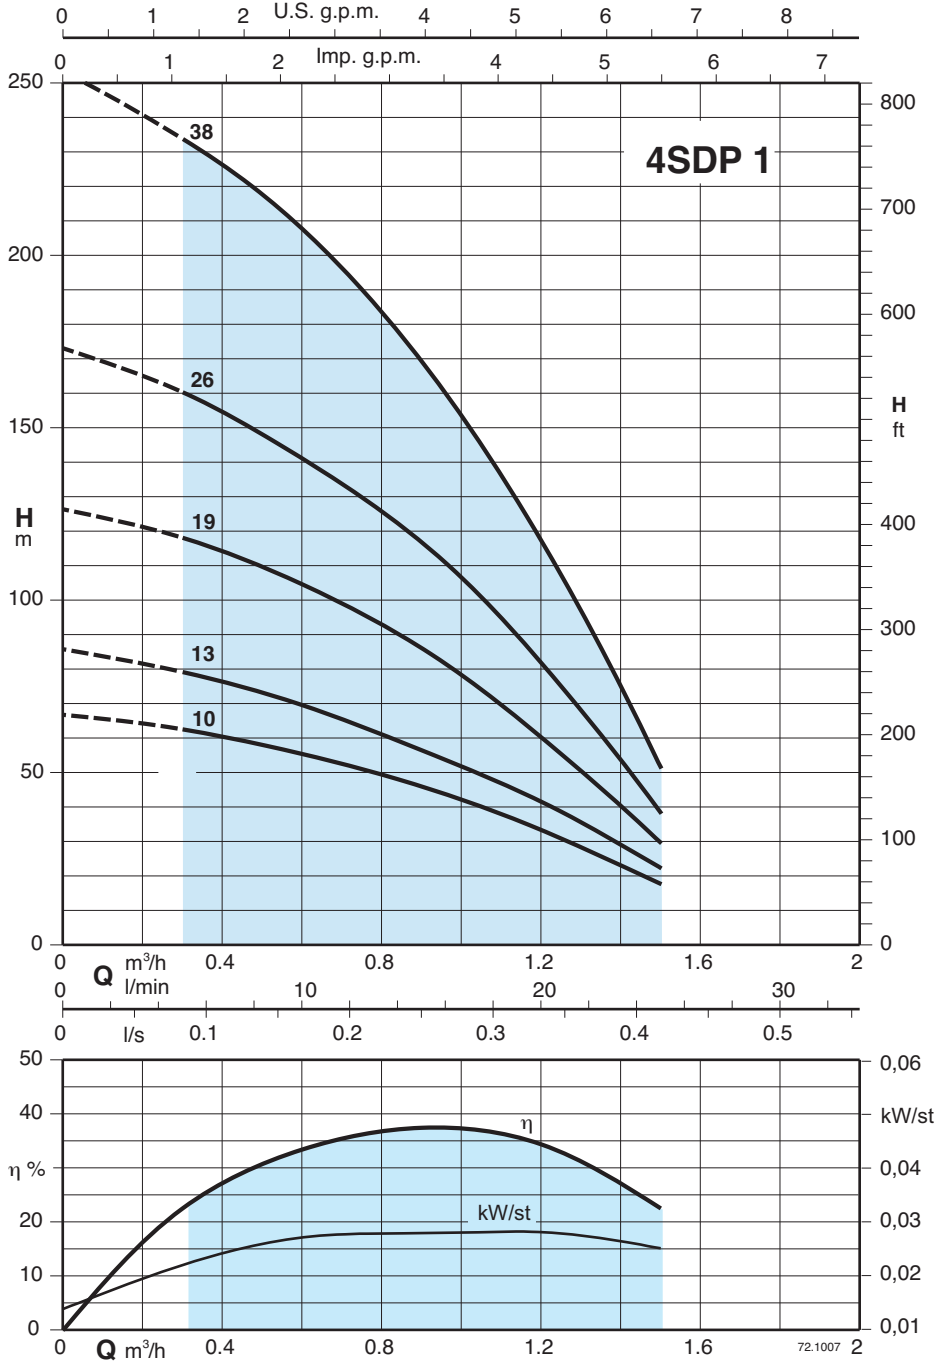

3~	400 V (380-415) 50 Hz A	1~	230V Capacitor P1			P2			Q	n ≈ 2900 rpm									
			A	μF	kW	kW	HP	m³/h		0	0,3	0,6	0,9	1,2	1,5				
									l/min	0	5	10	15	20	25				
4SDP 1/10C	1,8	4SDPM 1/10C	3,6	20	0,72	0,37	0,5	H m	67	63	55	46	33	18					
4SDP 1/13C	1,8	4SDPM 1/13C	3,6	20	0,72	0,37	0,5		86	78	70	56	42	23					
4SDP 1/19C	2	4SDPM 1/19C	4,7	25	0,95	0,55	0,75		126	118	105	86	60	30					
4SDP 1/26C	2,5	4SDPM 1/26C	5,9	35	1,22	0,75	1		173	160	141	117	81	39					
4SDP 1/38C	3,4	4SDPM 1/38C	8,3	40	1,74	1,1	1,5		253	234	208	169	117	52					

f	4SDP		4SDPM	
	fM	kg	fM	kg
mm	mm	kg	mm	kg
324	635	11	635	10,9
377	688	11,4	688	11,3
481	812	12,4	812	14,1
642	998	14,5	998	15,2
864	1235	18,7	1260	19,9



P1 Max. power input P2 Rated motor power output \* Only for single-phase motor 230 V - 50 Hz (on request) Tolerances according to UNI EN ISO 9906:2012

# 4SDP 2

Submersible borehole pumps for 4" wells



## Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

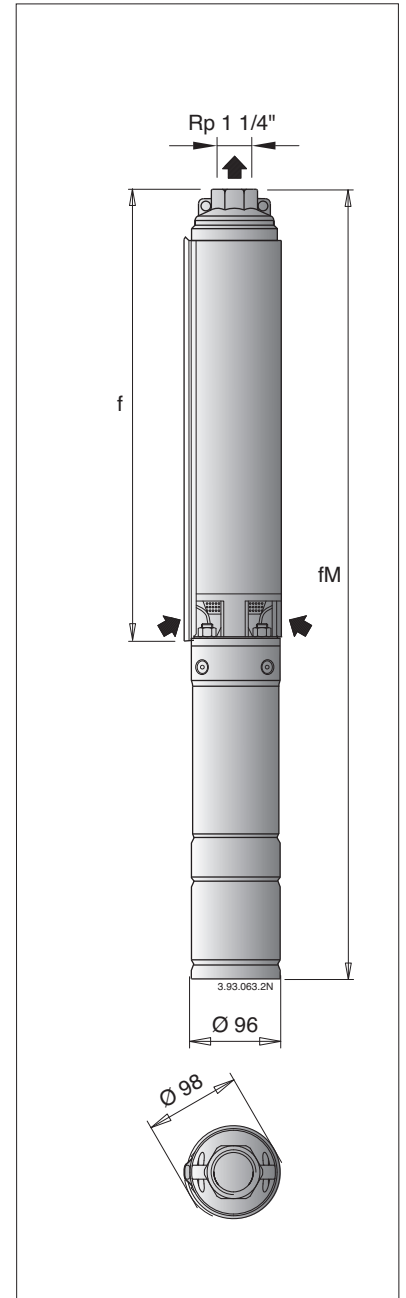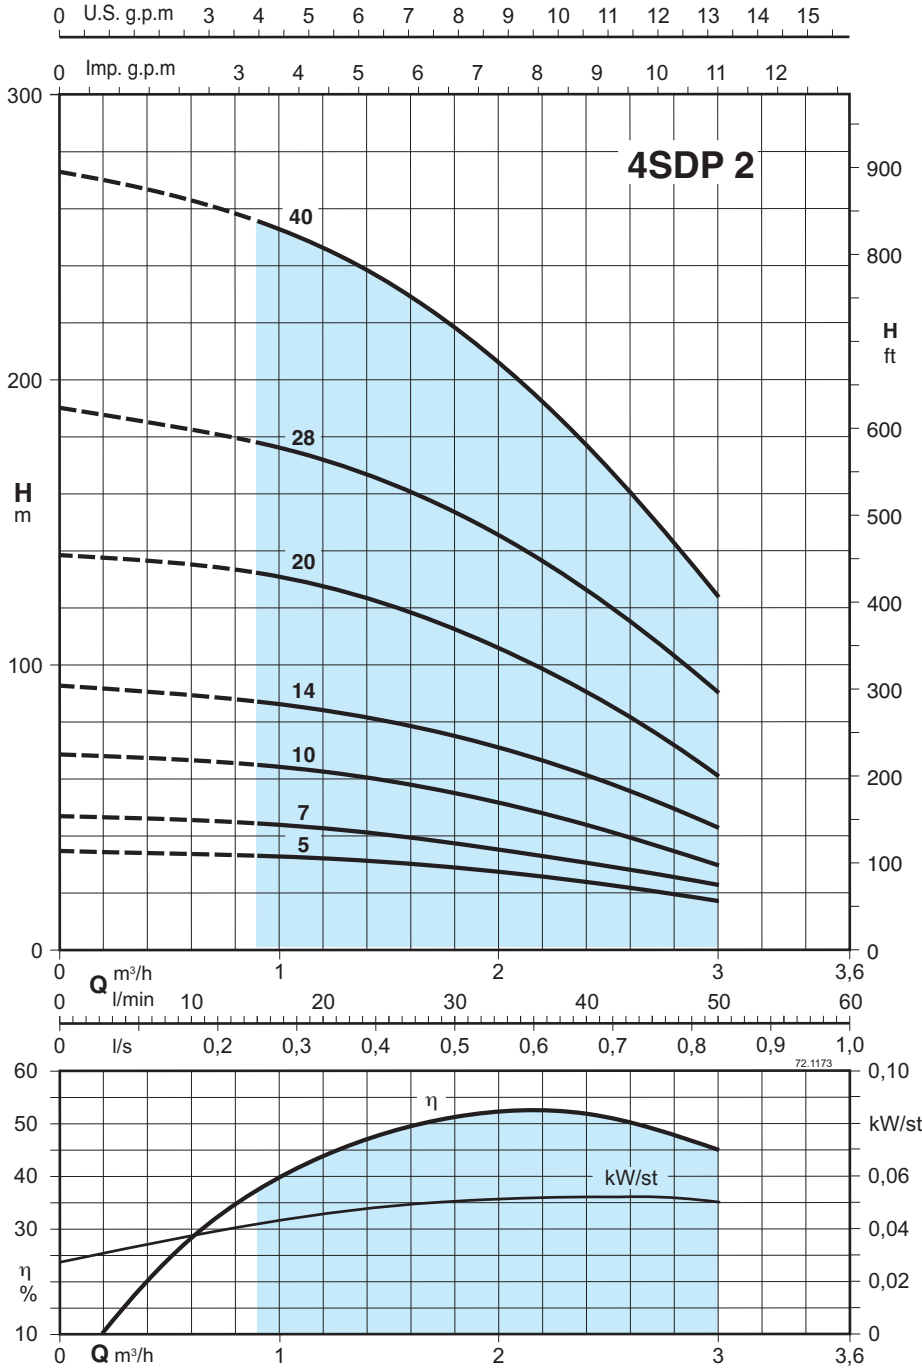

3~	400 V (380-415) 50 Hz A	1~	230V Capacitor P1		P2			Q m³/h l/min	n ≈ 2900 rpm												
			A	μF	kW	kW	HP		0	0,9	1,2	1,5	1,8	2,1	2,4	2,7	3				
4SDP 2/5C	1,2	4SDPM 2/5C	3,6	20	0,72	0,37	0,5	H m	34	32	31	29	27	25	23	19	16				
4SDP 2/7C	1,2	4SDPM 2/7C	3,6	20	0,72	0,37	0,5		46	43	42	39	36	33	29	26	22				
4SDP 2/10C	1,5	4SDPM 2/10C	4,7	25	0,95	0,55	0,75		67	64	61	58	54	49	43	36	28				
4SDP 2/14C	2,2	4SDPM 2/14C	5,9	35	1,22	0,75	1		92	86	83	79	74	67	60	52	42				
4SDP 2/20C	2,8	4SDPM 2/20C	8,3	40	1,74	1,1	1,5		139	131	127	120	111	101	90	75	60				
4SDP 2/28C	3,5	4SDPM 2/28C	10,7	60	2,29	1,5	2		190	178	172	163	153	141	126	108	89				
4SDP 2/40C	5,5	4SDPM 2/40C	15,2	80	3,25	2,2	3		273	256	246	234	218	199	177	151	123				

f mm	4SDP			4SDPM	
	fM mm	kg		fM mm	kg
236	547	10,2		547	10,1
271	582	10,5		582	10,4
324	655	11		655	12,7
394	750	12,6		750	13,3
499	870	14,4		895	15,6
680	1076	17,7		1117	19,3
885	1322	21		1377	25



P1: Max. power input P2: Rated motor power output \* Only for single-phase motor 230 V - 50 Hz (on request) Tolerances according to UNI EN ISO 9906:2012

# 4SDP 3

Submersible borehole pumps for 4" wells



## Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

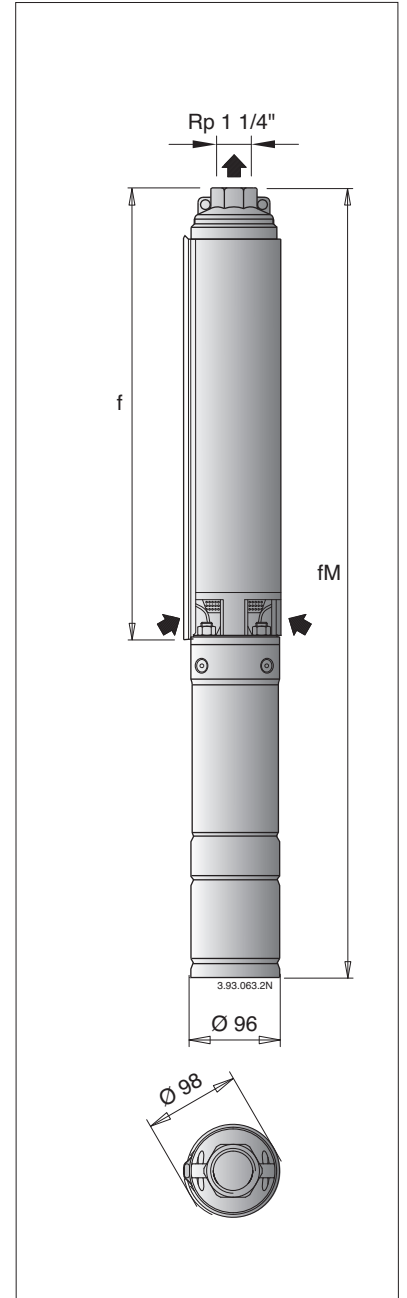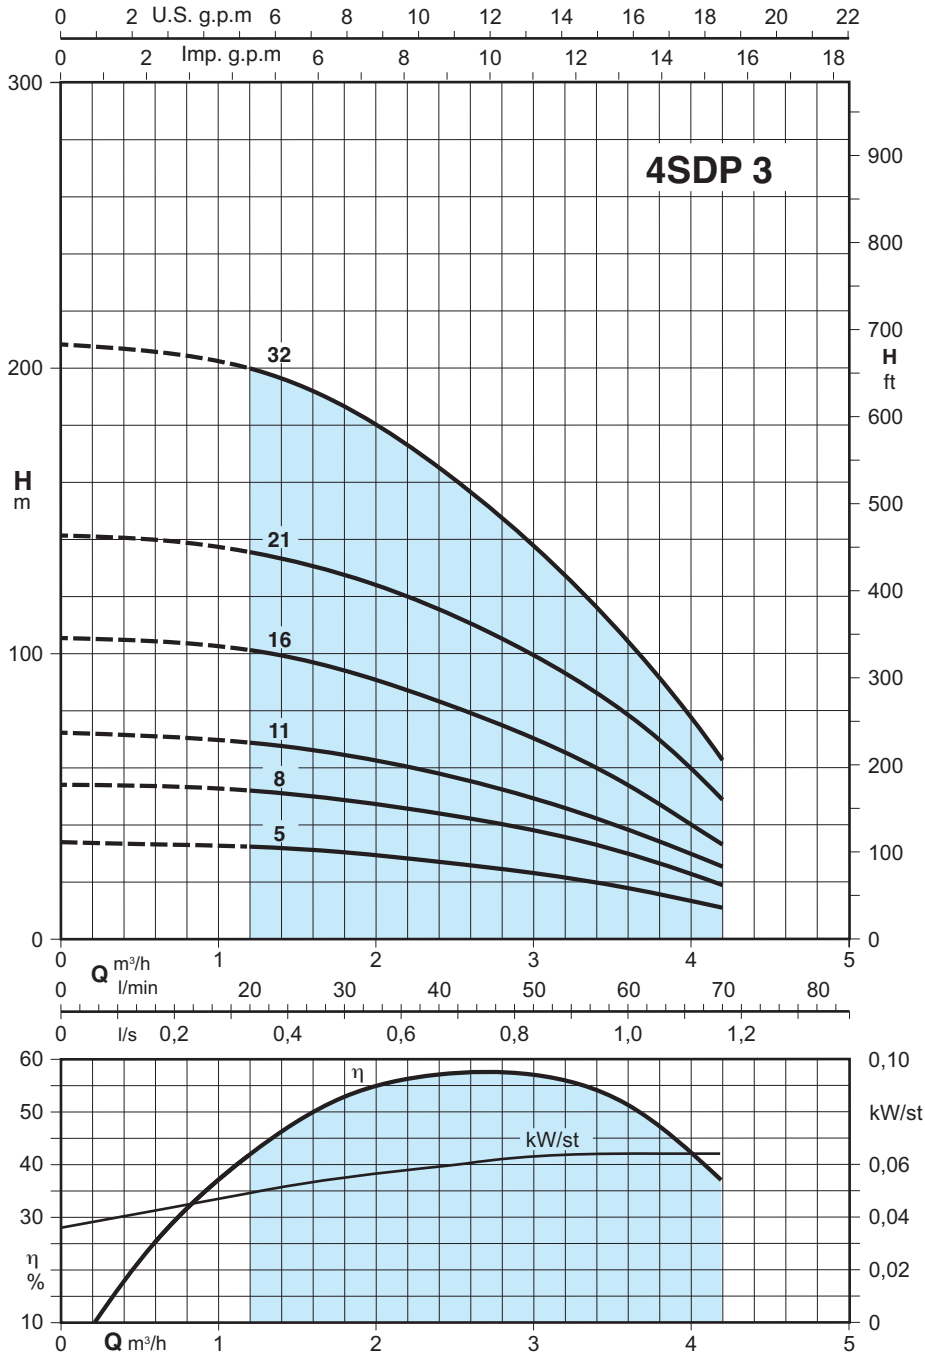

	400 V (380-415) 50 Hz		230V Capacitor P1 450 Vc			P2		Q m <sup>3</sup> /h l/min	n $\approx$ 2900 rpm										
	3~ A	1~ A	A	$\mu$ F	kW	kW	HP		0	1,2	1,5	1,8	2,1	2,4	2,7	3	3,6	4,2	
4SDP 3/5C	1,8	4SDPM 3/5C	3,6	20	0,72	0,37	0,5	H m	34	32	31	30	29	27	25	23	18	11	
4SDP 3/8C	2	4SDPM 3/8C	4,7	25	0,95	0,55	0,75		54	51	50	49	46	43	41	38	30	19	
4SDP 3/11C	2,5	4SDPM 3/11C	5,9	35	1,22	0,75	1		72	68	66	64	61	58	54	49	38	26	
4SDP 3/16C	3,4	4SDPM 3/16C	8,3	40	1,74	1,1	1,5		106	101	98	95	89	83	77	70	54	33	
4SDP 3/21C	4,8	4SDPM 3/21C	10,7	60	2,29	1,5	2		142	135	132	127	122	115	108	100	79	49	
4SDP 3/32C	6,1	4SDPM 3/32C	15,2	80	3,25	2,2	3		208	200	194	187	177	165	152	138	104	62	

f mm	4SDP			4SDPM		
	fM mm	kg		fM mm	kg	
236	547	10,2		547	10,1	
289	620	10,6		620	12,3	
342	698	12,1		698	12,8	
430	801	13,7		826	14,9	
519	915	15,8		956	17,4	
787	1224	19,8		1279	23,8	



P<sub>1</sub>: Max. power input

P<sub>2</sub>: Rated motor power output

\* Only for single-phase motor 230 V - 50 Hz (on request)

Tolerances according to UNI EN ISO 9906:2012

### Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

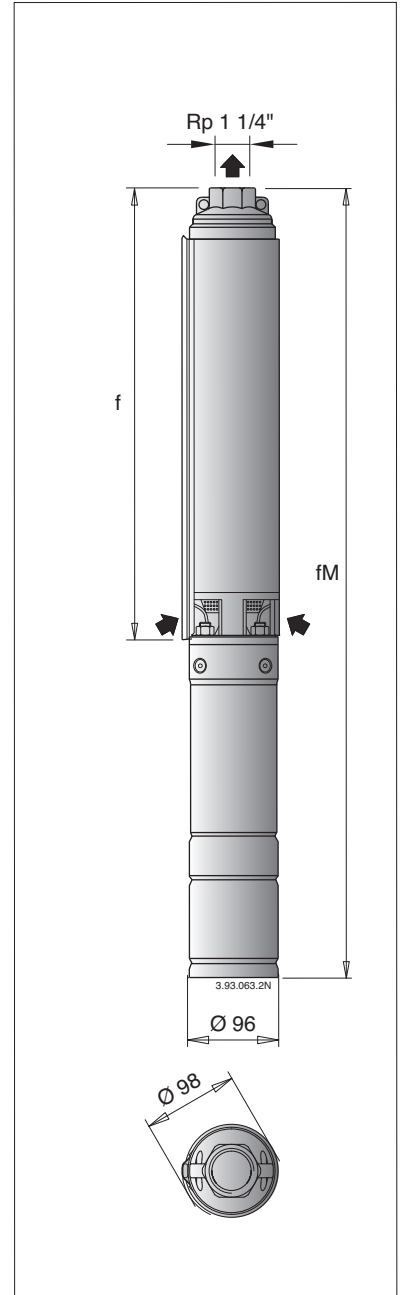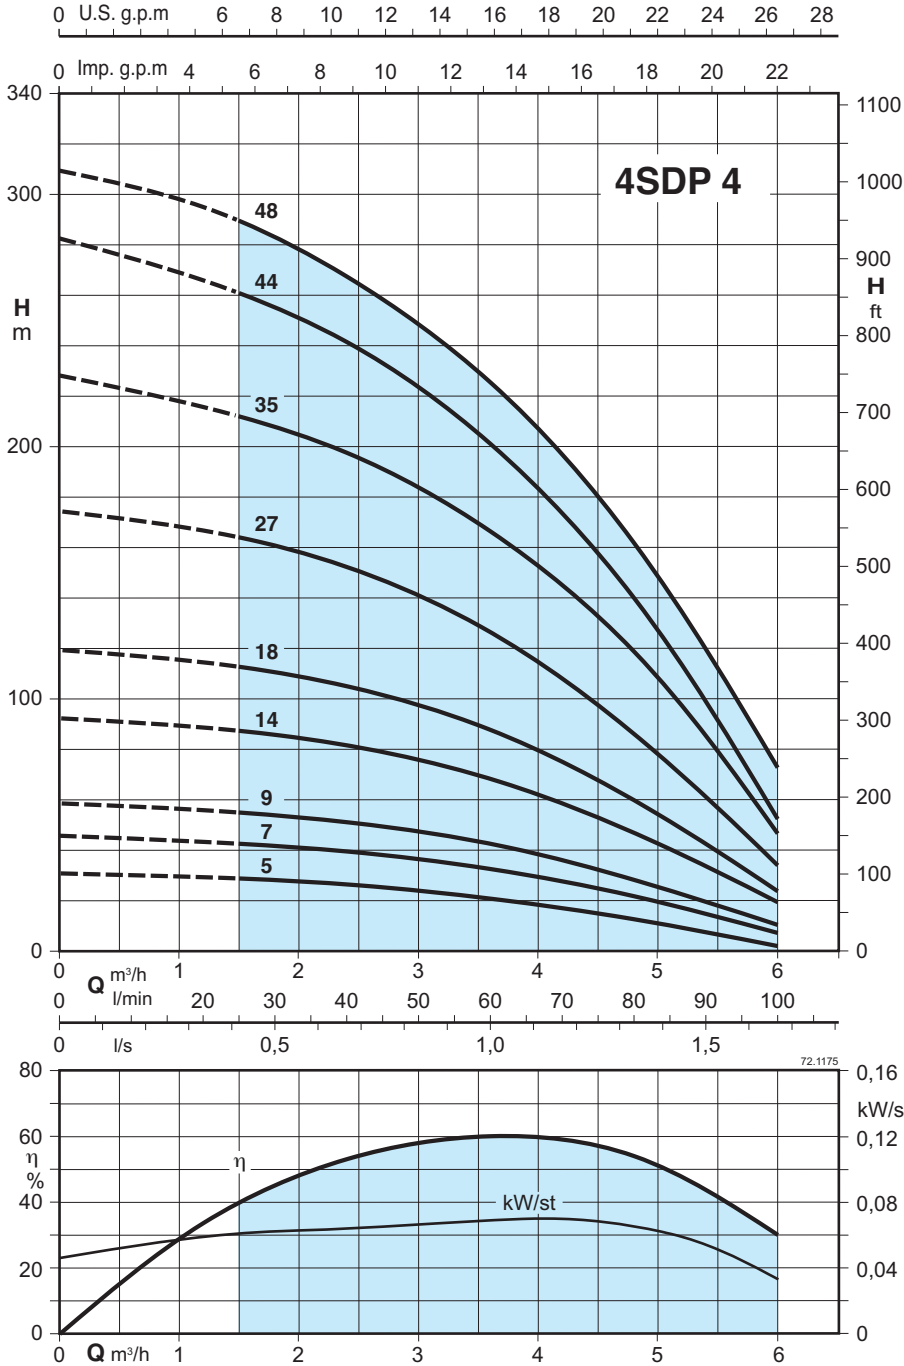

3~	400 V (380-415) 50 Hz	1~	230V Capacitor P1					P2	Q	n ≈ 2900 rpm												
			450 Vc							m³/h	H m											
			A	μF	kW	kW	HP				0	1,5	1,8	2,1	2,4	3	3,6	4,2	4,8	6		
4SDP 4/5C	1,8	4SDPM 4/5C	3,6	20	0,72	0,37	0,5	33	29	28	27	26	24	21	18	13	3	257	568	10,4	568	10,3
4SDP 4/7C	2	4SDPM 4/7C	4,7	25	0,95	0,55	0,75	46	43	42	41	39	36	33	28	22	7	301	632	10,7	632	12,4
4SDP 4/9C	2,5	4SDPM 4/9C	5,9	35	1,22	0,75	1	59	55	54	52	51	47	43	37	28	10	344	700	12	700	12,7
4SDP 4/14C	3,4	4SDPM 4/14C	8,3	40	1,74	1,1	1,5	93	87	86	83	81	76	68	58	47	20	452	823	13,6	848	14,8
4SDP 4/18C	4,8	4SDPM 4/18C	10,7	60	2,29	1,5	2	120	113	111	108	105	98	88	75	60	25	538	934	15,5	975	17,1
4SDP 4/27C	6,1	4SDPM 4/27C	15,2	80	3,25	2,2	3	175	164	161	157	152	141	127	109	87	35	805	1242	18,9	1297	22,9
4SDP 4/35C	7,1					3	4	228	212	208	203	197	184	166	145	119	46	972	1422	23,8		
4SDP 4/44C	9,2					4	5,5	282	261	255	249	241	223	201	173	140	52	1166	1671	28,5		
4SDP 4/48C	9,2					4	5,5	309	289	283	276	267	248	225	197	162	73	1291	1796	29,1		

P1: Max. power input

P2: Rated motor power output

\* Only for single-phase motor 230 V - 50 Hz (on request)



Tolerances according to UNI EN ISO 9906:2012

# 4SDP 6

Submersible borehole pumps for 4" wells



## Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

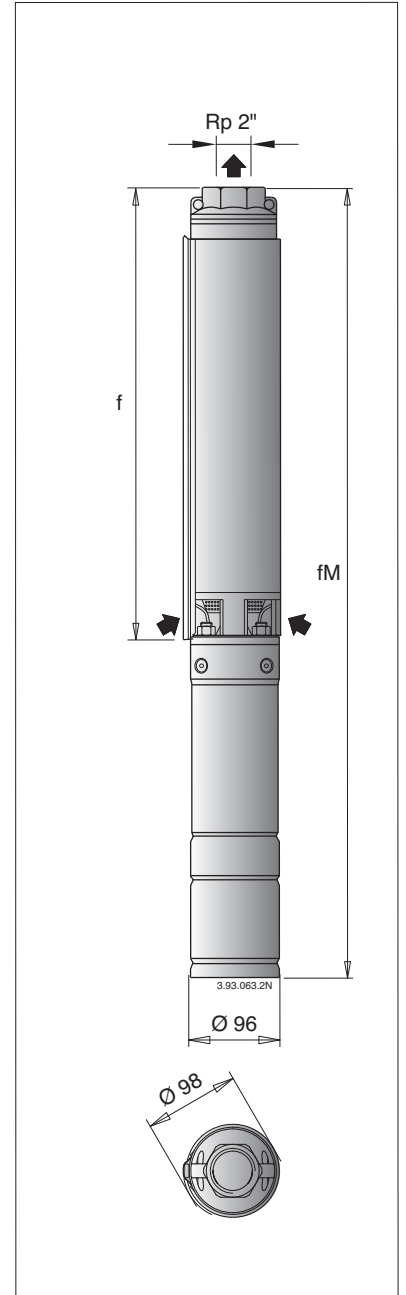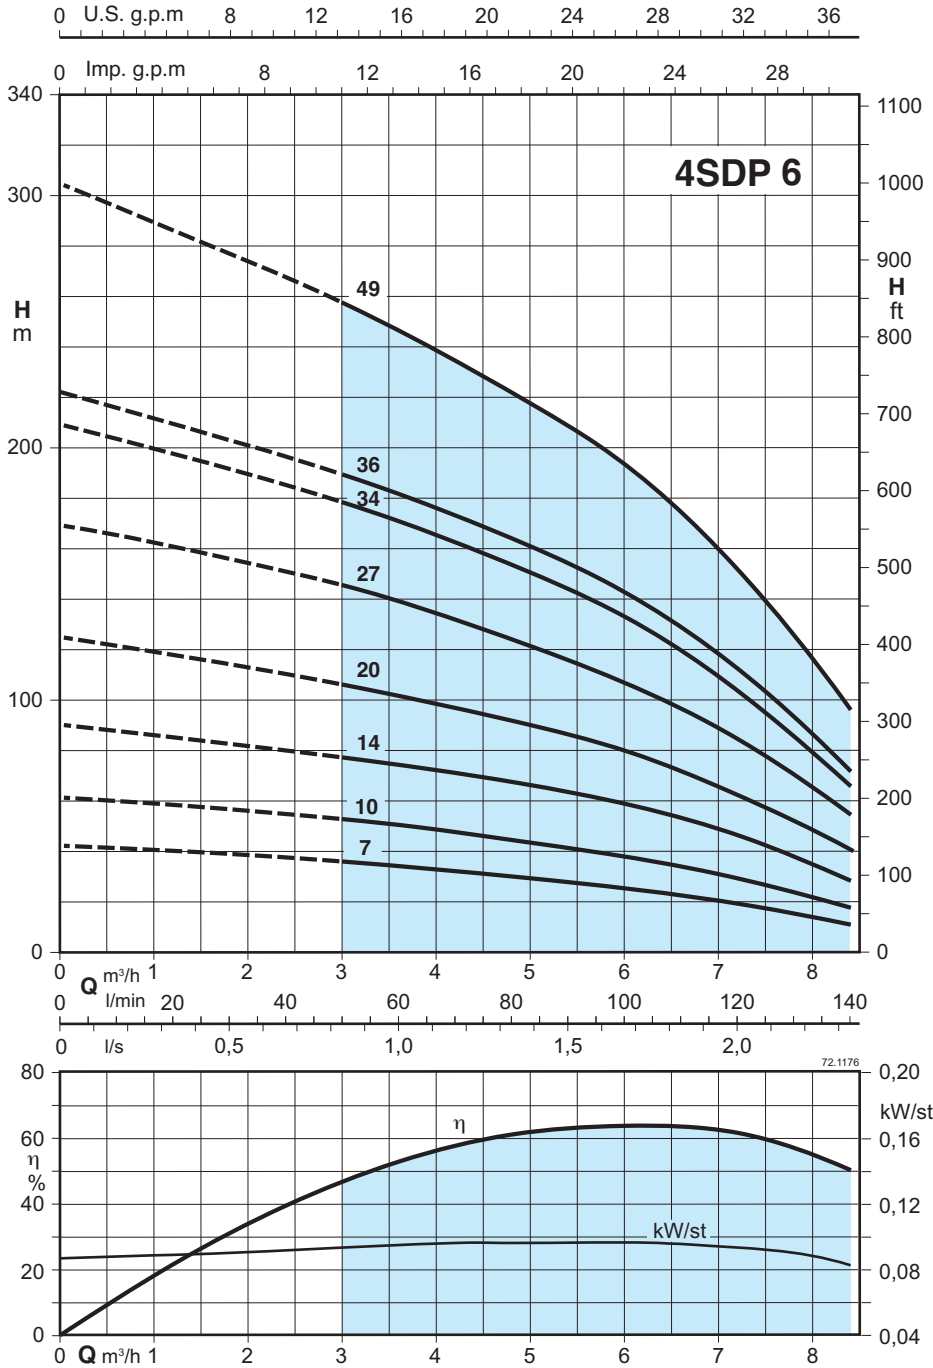

	3~ 400 V (380-415) 50 Hz		1~ 230V Capacitor P1 450 Vc				P2		Q	n ≈ 2900 rpm														
	A		A	μF	kW	kW	HP	m³/h		H m														
										0	3	3,6	4,2	4,8	5,4	6	7,2	8,4						
4SDP 6/7C	2,5	4SDPM 6/7C	5,9	35	1,22	0,75	1		42	36	34	32	30	28	25	19	11							
4SDP 6/10C	3,4	4SDPM 6/10C	8,3	40	1,74	1,1	1,5		62	53	51	48	45	41	38	29	18							
4SDP 6/14C	4,8	4SDPM 6/14C	10,7	60	2,29	1,5	2		90	77	74	71	68	63	59	46	28							
4SDP 6/20C	6,1	4SDPM 6/20C	15,2	80	3,25	2,2	3		125	107	102	97	92	86	80	62	40							
4SDP 6/27C	7,1					3	4		169	145	139	131	123	115	107	84	55							
4SDP 6/34C	9,2					4	5,5		208	178	170	162	153	143	132	103	66							
4SDP 6/36C	9,2					4	5,5		221	190	181	173	164	154	143	112	72							
4SDP 6/49C	12,3					5,5	7,5		302	257	246	234	222	209	193	151	96							

f	4SDP			4SDPM	
	mm	fM mm	kg	fM mm	kg
390	746	12,4	746	13,1	
483	854	14,1	879	15,3	
607	1003	16,5	1044	18,1	
831	1268	19,2	1323	23,2	
1086	1536	25,5			
1295	1800	30,8			
1356	1861	31,4			
1840	2429	39,9			

P1: Max. power input P2: Rated motor power output \* Only for single-phase motor 230 V - 50 Hz (on request) Tolerances according to UNI EN ISO 9906:2012







# 4SDP 16

Submersible borehole pumps for 4" wells



## Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

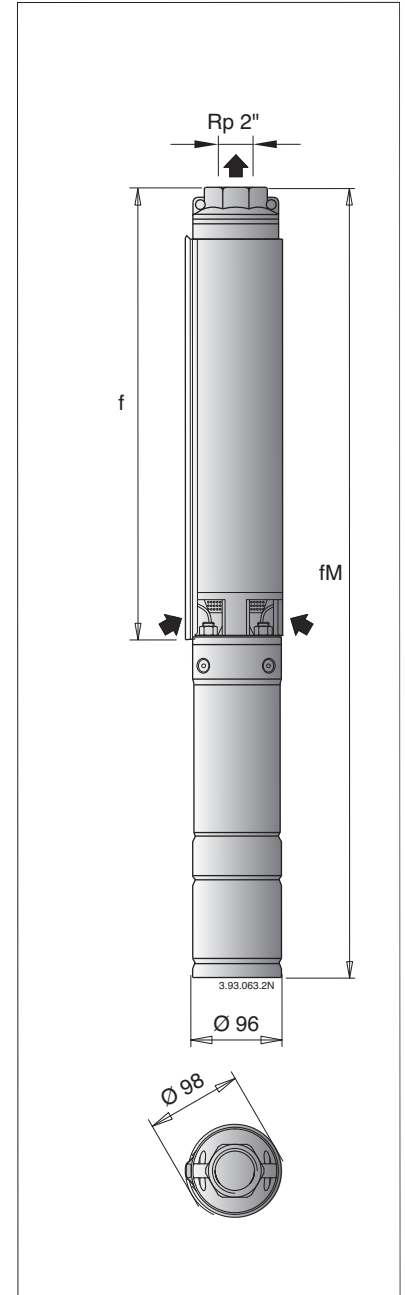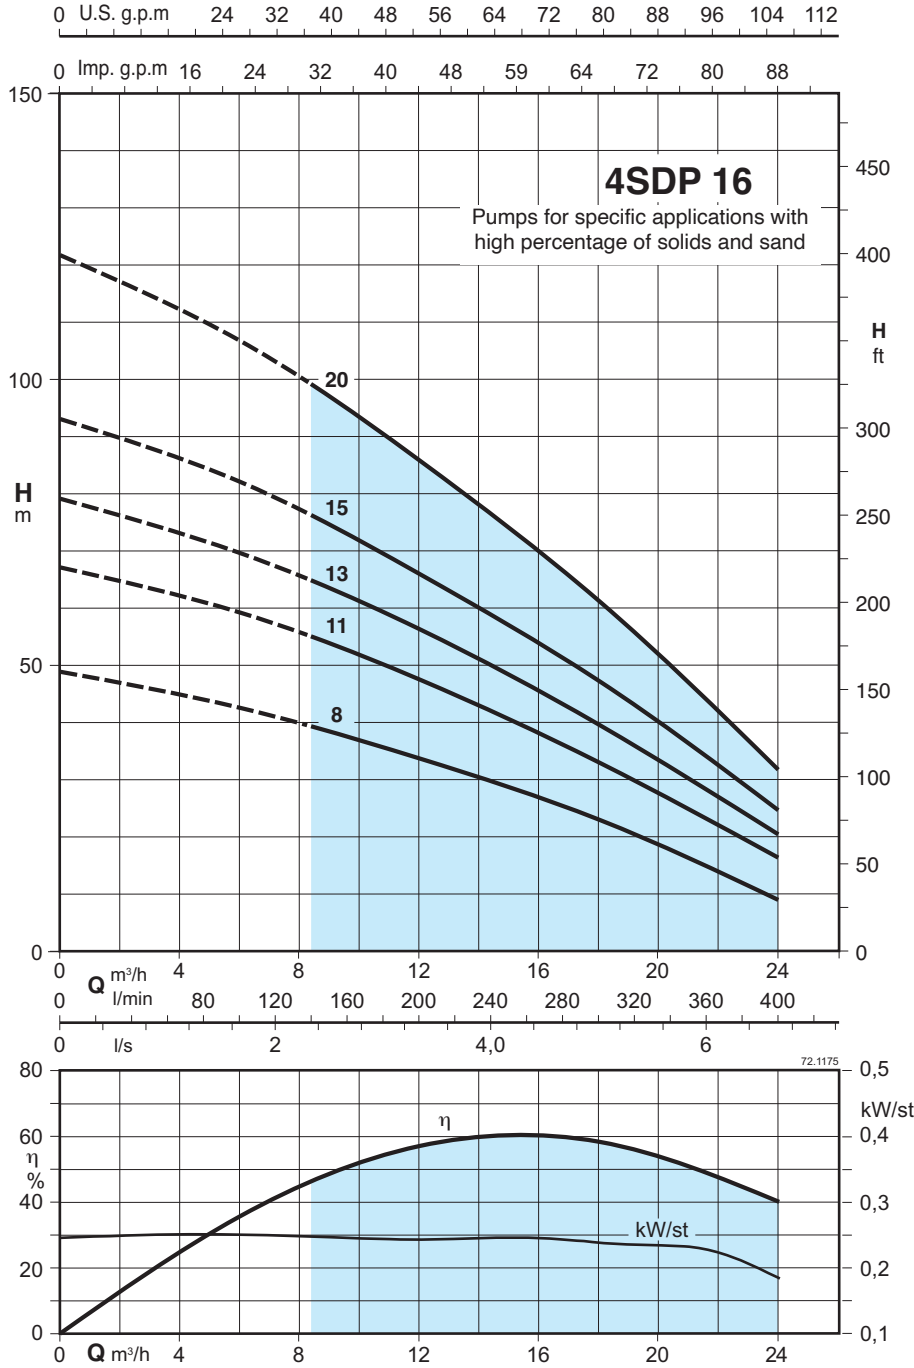

	400 V (380-415) 50 Hz		230V Capacitor P1 450 Vc				P2		Q m <sup>3</sup> /h l/min H m	n $\approx$ 2900 rpm										
	3~ A	1~ A	A	$\mu$ F	kW	kW	HP	Q												
								0		8,4	9,6	10,8	12	13,2	15,6	18	21,6	24		
4SDP 16/8C	6,1	4SDPM 16/8C	15,2	80	3,25	2,2	3	49	39	38	36	34	32	28	23	15	9			
4SDP 16/11C	7,1					3	4	67	55	53	50	48	45	39	33	23	16			
4SDP 16/13C	9,2					4	5,5	79	65	62	59	56	53	47	40	28	20			
4SDP 16/15C	9,2					4	5,5	93	76	73	70	66	62	55	47	34	25			
4SDP 16/20C	12,3					5,5	7,5	122	99	95	90	86	81	72	61	44	32			

f mm	4SDP		4SDPM	
	fM mm	kg	fM mm	kg
676	1113	18	1168	22
880	1330	23		
1013	1518	27,5		
1149	1654	28,7		
1489	2078	36,5		

P<sub>1</sub>: Max. power input

P<sub>2</sub>: Rated motor power output

\* Only for single-phase motor 230 V - 50 Hz (on request)


Tolerances according to UNI EN ISO 9906:2012

# 6SDN 12

Submersible borehole pumps for 6" wells



## Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

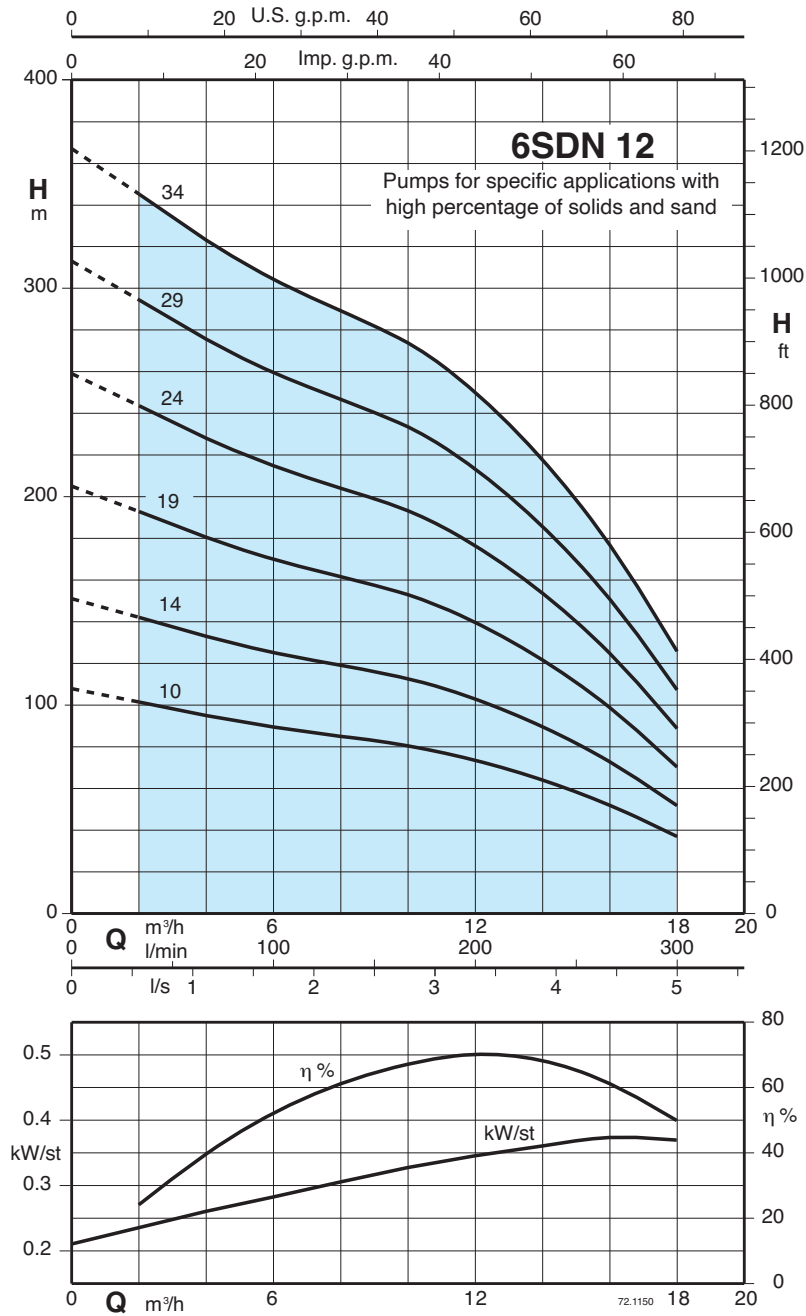

3~	P <sub>2</sub>		Q	n ≈ 2900 rpm													
	kW	HP		H													
				m³/h	2	4	6	8	10	12	14	16	18				
			l/min	33,3	66,6	100	133,3	166,6	200	233	266	300					
6SDN 12/10	4	5,5	H m	102	95	89,5	85	80,5	73,5	64	52	37					
6SDN 12/14	5,5	7,5		142	133	125	119	113	103	89,5	73	52					
6SDN 12/19	7,5	10		193	181	170	162	153	140	122	99	70,5					
6SDN 12/24	9,2	12,5		244	231	215	204	193	176	154	125	89					
6SDN 12/29	11	15		294	276	260	247	233	213	186	151	107					
6SDN 12/34	13 (15)	17,5 (20)		345	323	304	289	274	250	218	177	126					

DN	f	
	mm	kg
G 3 ISO 228	715	15,5
	870	17,5
	1060	20
	1320	23
	1510	25,7
	1705	28,5

P<sub>2</sub> Rated motor power output

(...) FK motor rated power output

H Total head in m



Tolerances according to UNI EN ISO 9906:2012

# 6SDN 16

Submersible borehole pumps for 6" wells



## Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

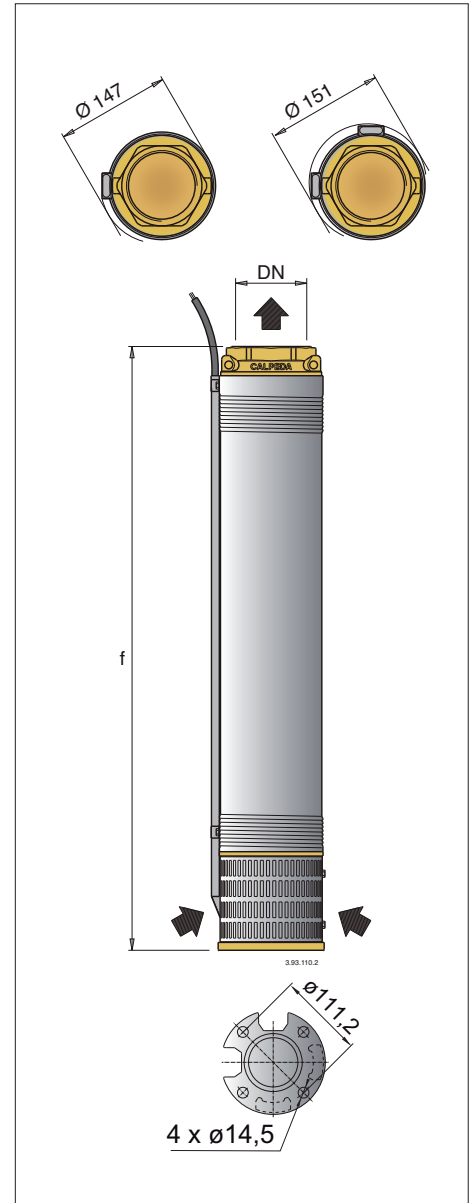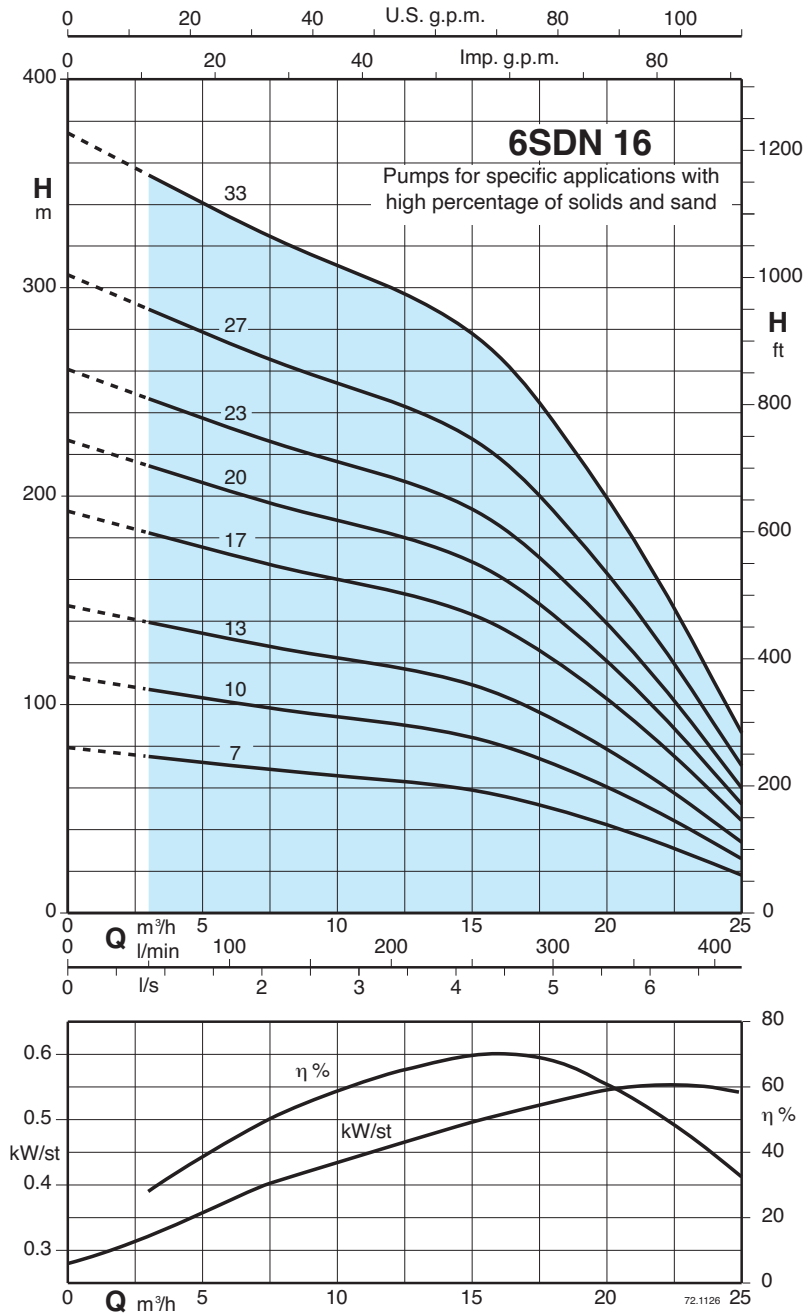

3~	P <sub>2</sub>		Q	n ≈ 2900 rpm											
				3	6	9	12	15	18	21	25				
	kW	HP	m³/h	l/min	50	100	150	200	250	300	350	416,6			
6SDN 16/7	4	5,5	H m	75	71	67	63,5	59	50	38	18,5				
6SDN 16/10	5,5	7,5		107	101	96	91	84	71,5	54,5	26				
6SDN 16/13	7,5	10		139	132	124	118	110	93	70,5	34				
6SDN 16/17	9,2	12,5		182	172	163	155	143	122	92,5	44,5				
6SDN 16/20	11	15		215	202	192	182	168	143	109	52,5				
6SDN 16/23	13 (15)	17,5 (20)		247	233	220	209	194	165	125	60				
6SDN 16/27	15	20		290	273	259	245	227	193	147	71				
6SDN 16/33	18,5	25		354	334	316	300	278	236	179	86,5				

DN	f	
	mm	kg
G 3 ISO 228	600	14
	715	15,5
	830	17
	985	19
	1100	20,5
	1285	22,5
	1435	24,6
	1665	28

P<sub>2</sub> Rated motor power output

(...) FK motor rated power output

H Total head in m



Tolerances according to UNI EN ISO 9906:2012

# 6SDN 21

Submersible borehole pumps for 6" wells



## Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

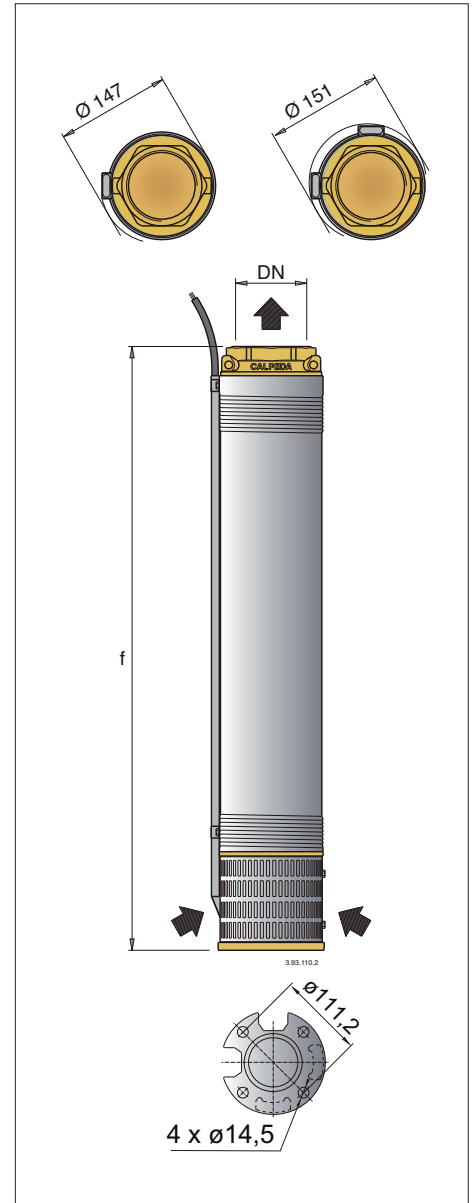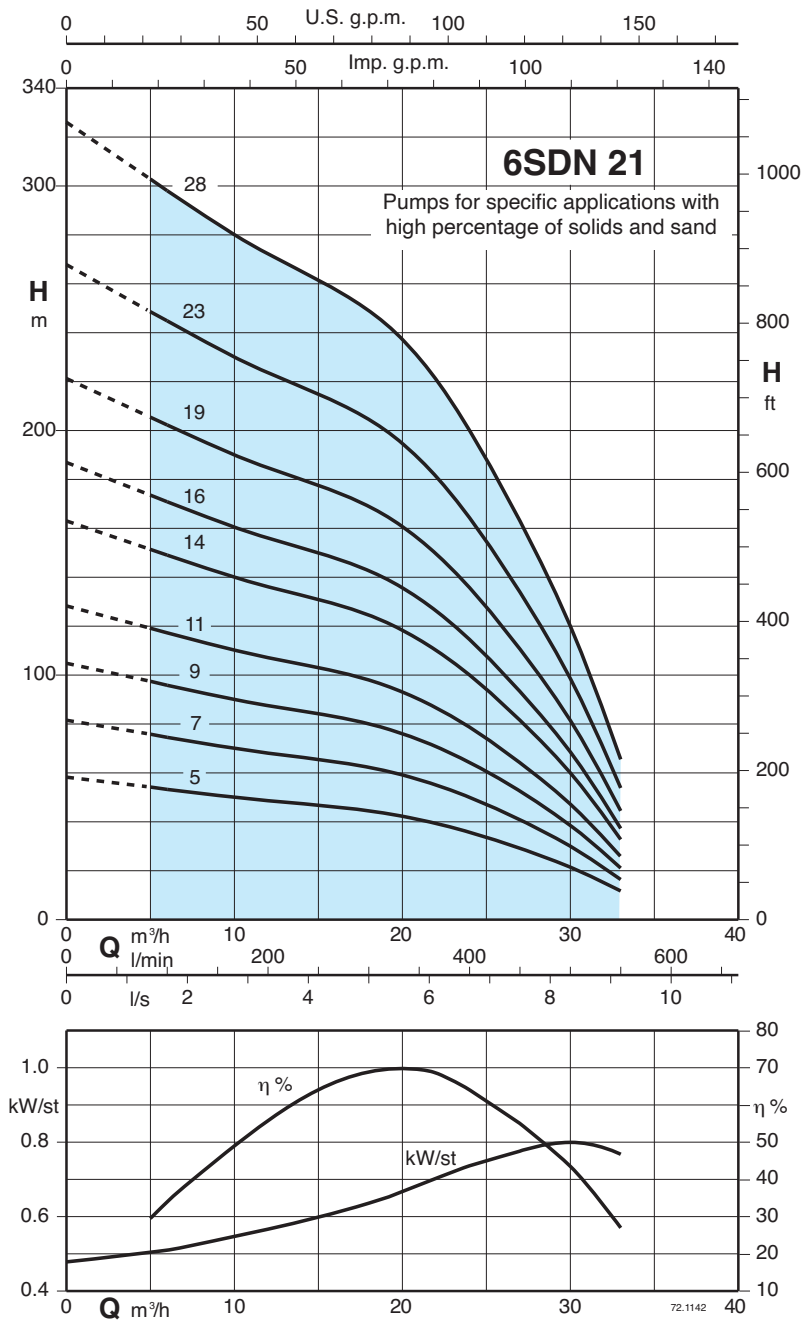

3~	P <sub>2</sub>		Q	n ≈ 2900 rpm										
	kW	HP		m³/h	5	9	12	15	18	21	24	27	30	33
				l/min	83,3	150	200	250	300	350	400	450	500	550
6SDN 21/5	4	5,5	H m	54	51	48,5	46,5	45	41,5	36	29	21,5	11,5	
6SDN 21/7	5,5	7,5		75,5	71,5	68	65	62,5	58	50	41	30	16	
6SDN 21/9	7,5	10		97	92	87,5	83,5	80,5	74,5	64,5	53	38,5	21	
6SDN 21/11	9,2	12,5		119	112	107	102	99	91	79	64	47	25,5	
6SDN 21/14	11	15		151	143	136	130	125	116	100	81,5	60	32,5	
6SDN 21/16	13 (15)	17,5 (20)		173	163	155	149	143	132	114	93	69	37	
6SDN 21/19	15	20		205	194	185	176	170	157	136	111	81,5	44	
6SDN 21/23	18,5	25		249	235	224	213	206	190	164	134	99	53	
6SDN 21/28	22	30		303	286	272	260	251	231	200	163	120	64,5	

DN	f	
	mm	kg
G 3 ISO 228	565	13,3
	660	14,5
	755	15,7
	850	16,9
	990	18,7
	1085	19,9
	1225	21,7
	1480	24,5
	1710	27,5



P<sub>2</sub> Rated motor power output

(...) FK motor rated power output

H Total head in m

Tolerances according to UNI EN ISO 9906:2012

### Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

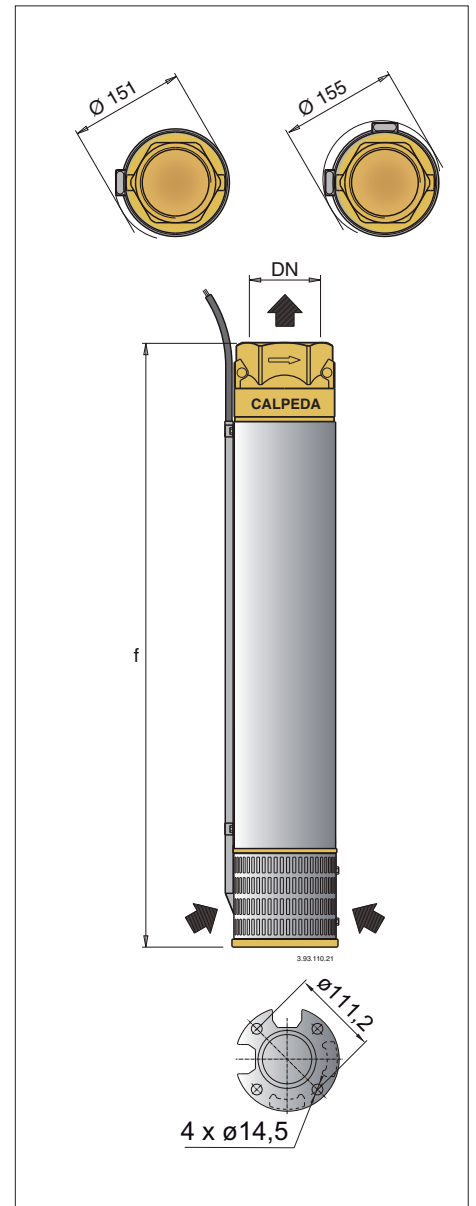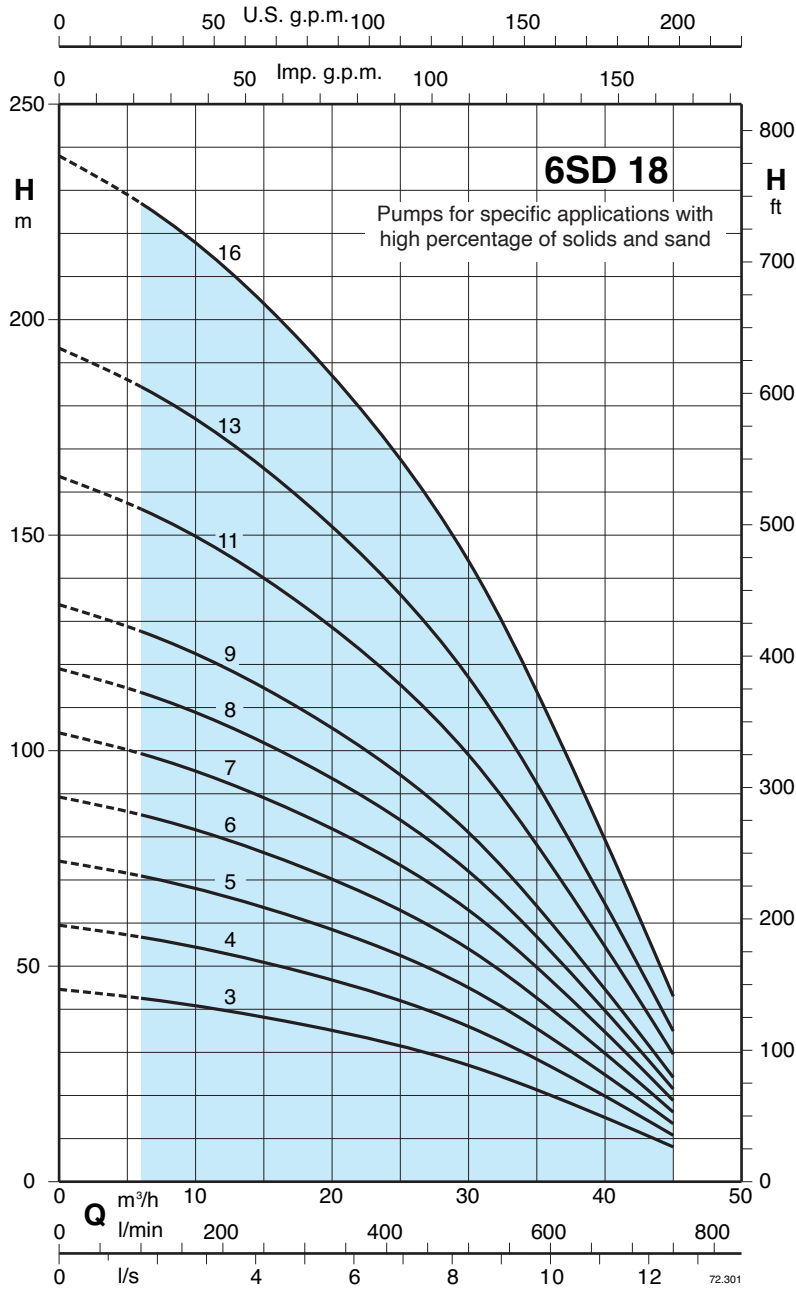

3 ~	P <sub>2</sub>		Q	n ≈ 2900 rpm													
	kW	HP		H													
				m													
			l/min	100	200	300	400	500	600	700	750						
6SD 18/3	4	5,5		42	39	36	32	27	20	12	8						
6SD 18/4	5,5	7,5		56	53	48	43	36	27	16	11						
6SD 18/5	7,5	10		70	66	60	53	45	34	21	13						
6SD 18/6	9,2	12,5		85	79	72	64	54	40	25	16						
6SD 18/7	9,2	12,5		100	93	84	75	63	46	28	19						
6SD 18/8	11	15		113	105	96	86	72	54	32	21						
6SD 18/9	13 (15)	17,5 (20)		127	119	108	96	81	60	37	24						
6SD 18/11	15	20		156	145	132	118	99	74	45	30						
6SD 18/13	18,5	25		184	172	157	139	117	87	52	35						
6SD 18/16	22	30		227	213	194	172	144	107	65	43						

DN	f	
	mm	kg
G 3 ISO 228	647	20,5
	756	23
	865	25
	974	27
	1083	29,5
	1192	32
	1301	34,5
	1519	39,5
1737	43	
2064	50,2	

P<sub>2</sub> Rated motor power output

(...) FK motor rated power output

H Total head in m



Tolerances according to UNI EN ISO 9906:2012

# 6SD 19

Submersible borehole pumps for 6" wells



## Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

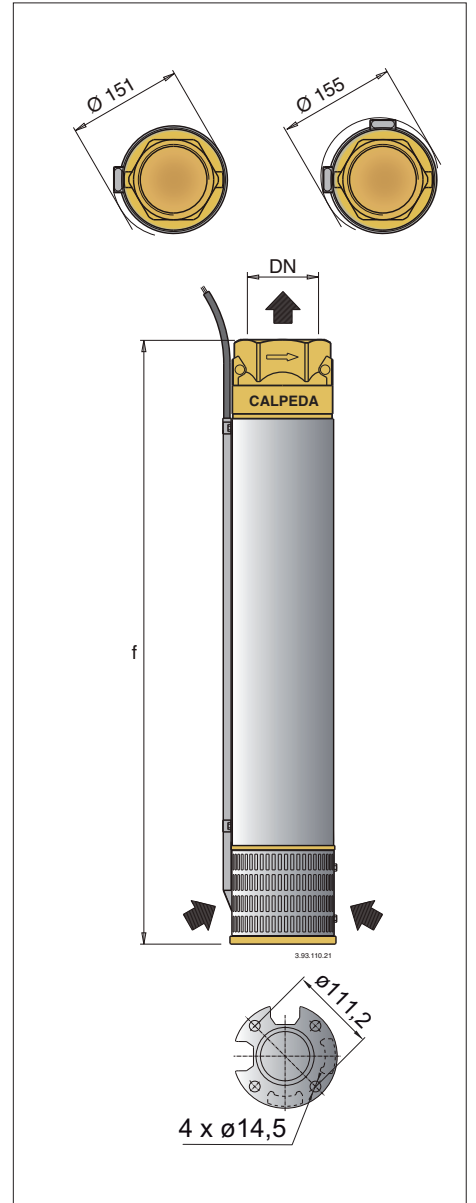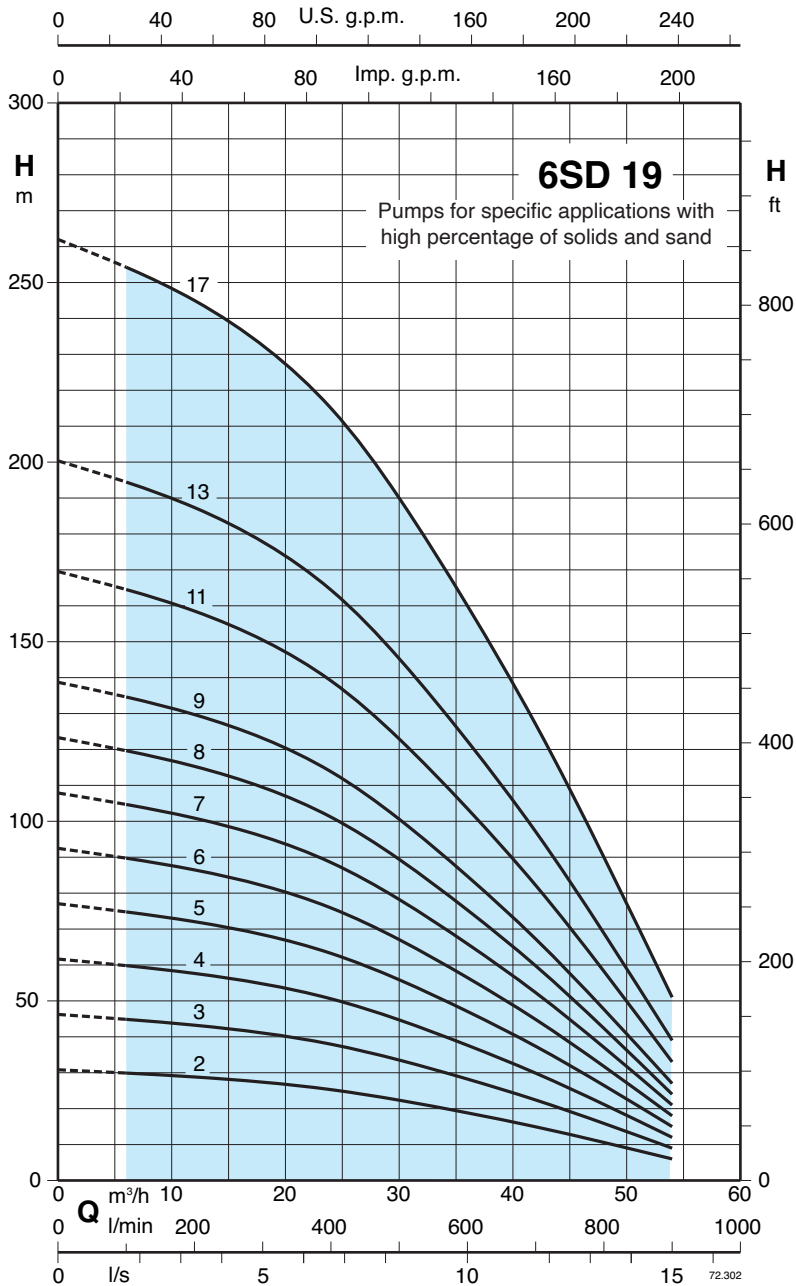

3~	P <sub>2</sub>		Q	n ≈ 2900 rpm												
				m³/h												
	kW	HP		l/min	6	12	18	24	30	36	42	48	54			
6SD 19/2	4	5,5	H m	30	29	27	25	22	19	15	10	6				
6SD 19/3	5,5	7,5		45	43	41	38	33	29	23	15	9				
6SD 19/4	7,5	10		60	57	55	50	45	38	30	21	12				
6SD 19/5	9,2	12,5		75	72	69	63	56	47	38	26	15				
6SD 19/6	11	15		90	86	82	75	67	56	45	31	18				
6SD 19/7	13 (15)	17,5 (20)		105	100	96	88	79	66	53	37	21				
6SD 19/8	15	20		120	115	110	101	89	75	60	42	24				
6SD 19/9	15	20		135	130	123	114	100	85	68	47	27				
6SD 19/11	18,5	25		165	158	151	139	123	104	83	58	33				
6SD 19/13	22	30		195	188	179	164	145	122	98	69	39				
6SD 19/17	30	40		255	245	234	215	190	160	127	90	51				

DN	f	
	mm	kg
G 3 ISO 228	538	18
	647	20,5
	756	23
	865	25
	974	27
	1083	29,5
	1192	32
	1301	34,5
	1519	39,5
	1737	43
	2173	53



P<sub>2</sub> Rated motor power output

(...) FK motor rated power output

H Total head in m

Tolerances according to UNI EN ISO 9906:2012

### Characteristic curves, performance $n \approx 2900$ rpm, dimensions and weights

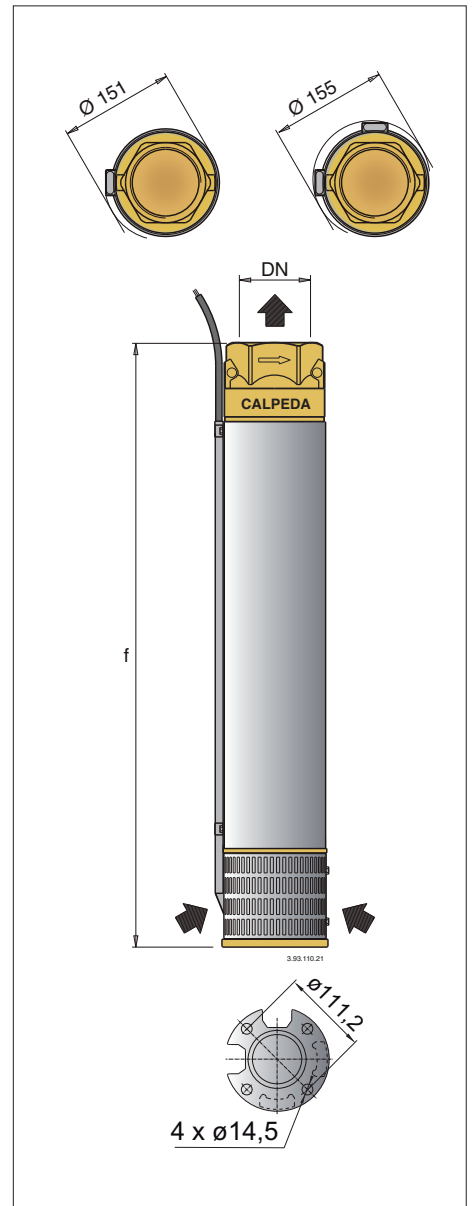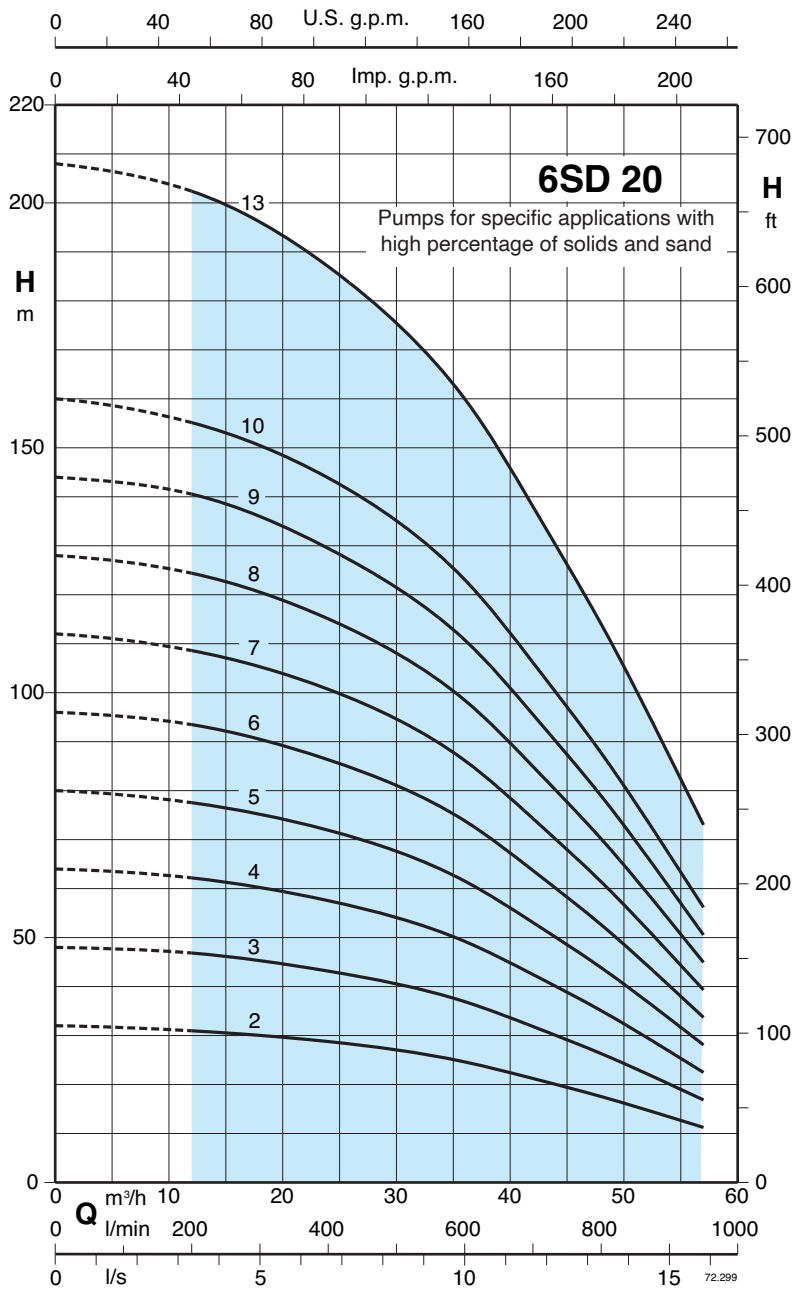

3~	P <sub>2</sub>		Q	n ≈ 2900 rpm														
	kW	HP		H														
				m														
			m³/h	12	18	24	30	36	42	48	54	57						
			l/min	200	300	400	500	600	700	800	900	950						
6SD 20/2	5,5	7,5		31	30	29	28	24	21	17	13	11						
6SD 20/3	7,5	10		46	45	44	42	37	32	26	20	17						
6SD 20/4	9,2	12,5		62	60	58	55	49	42	35	26	22						
6SD 20/5	11	15		77	76	73	68	61	53	44	33	28						
6SD 20/6	13 (15)	17,5 (20)		93	91	87	83	73	63	53	40	34						
6SD 20/7	15	20		108	106	102	96	86	74	61	47	39						
6SD 20/8	18,5	25		124	120	115	110	99	85	70	53	45						
6SD 20/9	18,5	25		140	136	130	124	111	96	79	60	51						
6SD 20/10	22	30		155	151	144	138	123	106	88	67	56						
6SD 20/13	30	40		202	196	188	179	160	138	114	87	73						

DN	f	
	mm	kg
G 3 ISO 228	538	18
	647	20,5
	756	23
	865	25
	974	27
	1083	29,5
	1192	32
	1301	34,5
1410	36,2	
1737	44,4	

P<sub>2</sub> Rated motor power output

(...) FK motor rated power output

H Total head in m

Tolerances according to UNI EN ISO 9906:2012



